

4-Channel A/V Modulator

Features

- Low Cost PAL TV Modulation
- Frequency Agile, Fully Programmable Output
- Ideal for use with VCRs, DVD Players, and Security Cameras etc.
- 4 Remote Control Repeater Outputs
- F Connector for TV Signal
- RCA Connectors for Audio and Video Signals
- Fully Shielded Housing
- Easy Installation and Programming



The Hills Home Integrated Systems Modulator processes Audio and Video signals from DVD Players, VCRs, Set-Top-Boxes, Security Cameras etc. for coaxial-cabled distribution to multiple outlets around the home. Each of the four channels can be independently assigned to any UHF channel. A feedback path for Infra-red Remote Control Signals from all output ports to the input enables these signal sources to be remotely controlled from anywhere near the outlets.

Specifications

Model	Home Automation 4-Channel AV Modulator
Frequency Range:	520MHz - 820MHz (CH27-CH69), each channel independently programmable
Output Level:	75dB μ V
Input / Output Impedance:	75 Ω
Return Loss:	> 15dB typ.
Power:	12V / 500mA Plug Pack (unregulated)



**home
integrated
systems**
A DIVISION OF HILLS INDUSTRIES LIMITED




A division of Hills Industries Ltd



Typical System Configuration

DVDs, VCRs, STBs...

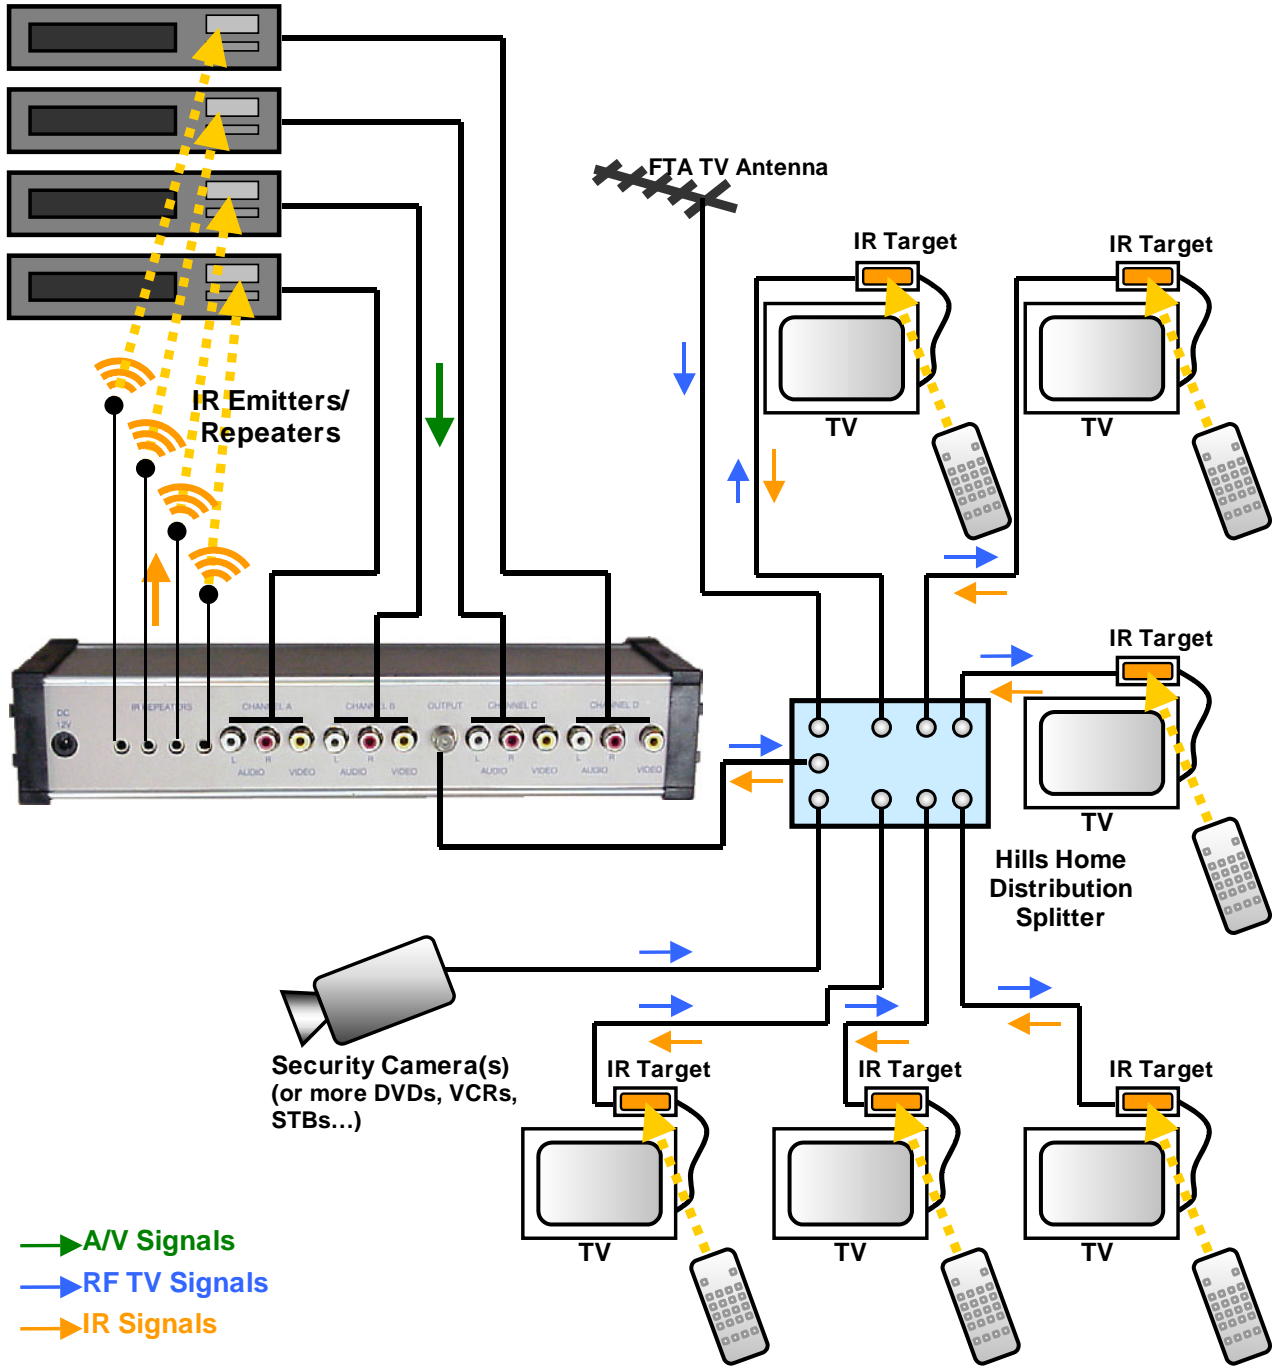

- A/V Signals
- RF TV Signals
- IR Signals